

## DS-UPS3000 UPS



- Built-in AVR
- Super fast charging
- Wide input voltage range
- Overload protection
- Short circuit protection
- Surge protection
- USB port for remote control
- LCD display


## ▪ Specification


<b>Power</b>	
UPS Capacity	3000 VA / 1800 W
<b>Input</b>	
Input Voltage Range	140 VAC to 290 VAC
Input Frequency	50/60 Hz self-adaptive
Plug Type	Schuko
<b>Output</b>	
Output Voltage Range	210 VAC to 235 VAC
Output Frequency	50/60 Hz $\pm$ 0.5 Hz self-adaptive
Transfer Time	$\leq$ 10 ms
Waveform	PWM
Outlet Type	TYPE L (10/16A)
Outlet Number	4
<b>Battery</b>	
Battery Type	12 V/9 Ah *4 pcs, lead-acid battery
Recharge Time	6-8 hours recover to 90% capacity
Typical Backup Time	Run time at 100w: 150 min Run time at 600w: 15 min Run time at 900w: 6 min
<b>Interface</b>	
Communicate Ports	USB
<b>Protection</b>	
Full Protection	Surge protection, Overload protection, Discharge protection, Short circuit protection
<b>Indicator</b>	
Display	LCD Screen Input Voltage, Output Voltage, Battery capacity, load level
Alarm	Charging Mode (DC mode): Sounding every 8 seconds Low Battery: Sounding every second Overloading Mode: Sounding every 0.5 seconds Fault: Continuously sounding
<b>General</b>	
Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)
Operating Humidity	30% to 90% (non-condensing)
Dimension	412 mm $\times$ 145 mm $\times$ 210 mm (16.22" $\times$ 5.71" $\times$ 8.27")
Weight	Approx. 18.5 kg (40.8 lb)

## ▪ Available Model

DS-UPS3000

▪ **Dimension**

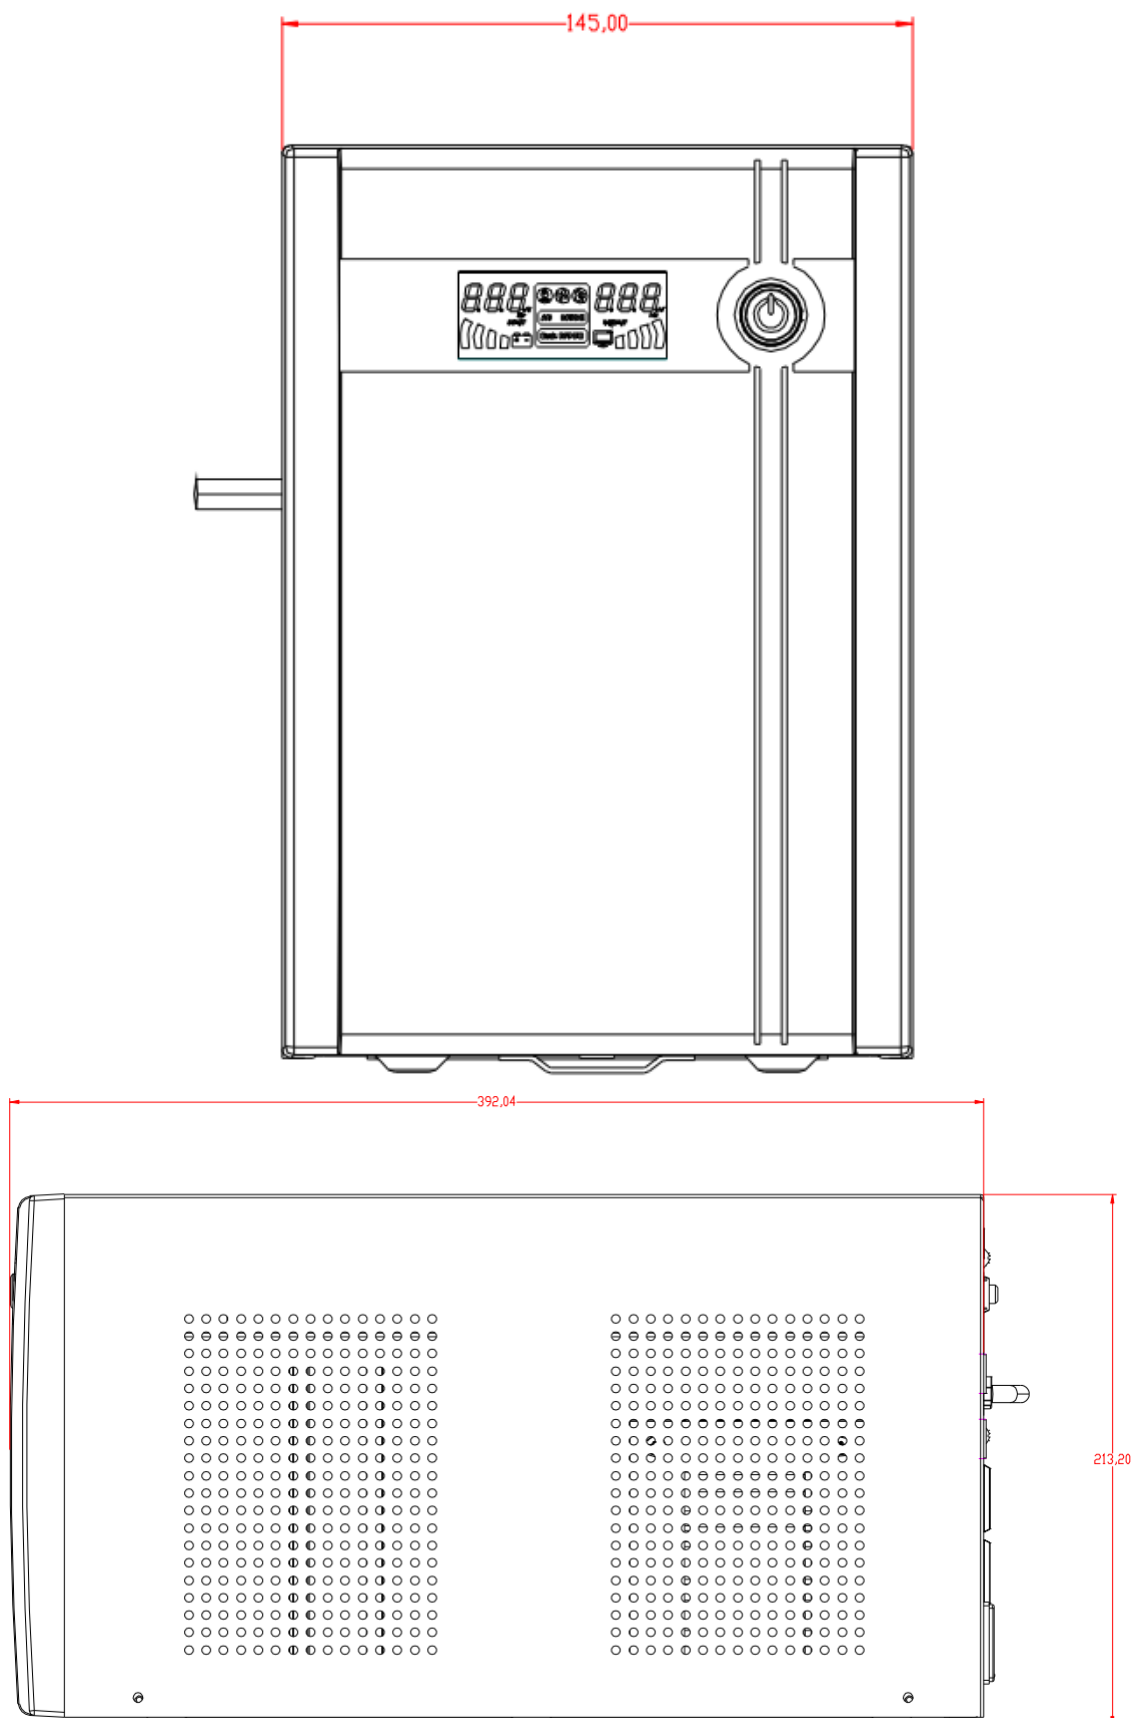

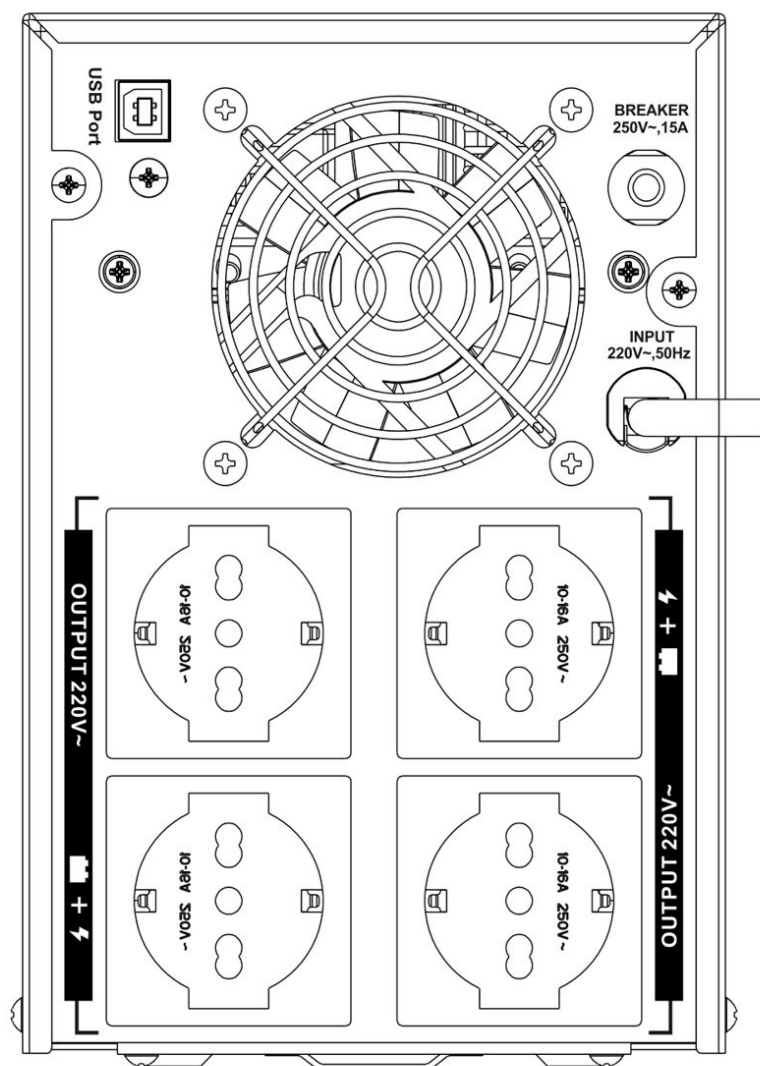

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
[www.hikvision.com](http://www.hikvision.com)



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq