

DS-KH8350-TE1 Network Indoor Station



- Premium tempered glass
- Aerospace-grade aluminum
- New UI V2.0: User friendly design
- 7-inch colorful touch screen with resolution 1024 × 600
- 8.6 mm Ultra-slim design

▪ Specification

System parameters	
Operation system	Linux
ROM	32 MB
RAM	128 MB
Processor	Embedded high performance processor
Display parameters	
Screen size	7-inch
Operation method	Capacitive touch screen
Type	Colorful IPS
Resolution	1024 × 600
Video parameters	
Lens	/
Resolution	/
FOV	/
Wide dynamic range (WDR)	/
Video compression standard	/
Focal length	/
Audio parameters	
Audio input	1 built-in omnidirectional microphone
Audio compression standard	G.711U
Audio output	1 built-in loudspeaker
Audio Input	Built-in omnidirectional microphone
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
Notice capacity	200
Linked indoor extensions capacity	16
Linked doorphone capacity	17
Linked network camera capacity	16
Network parameters	
Network protocol	TCP/IP, SIP, RTSP
Wi-Fi	/
Bluetooth	/
3G/4G	/
Zigbee	/
Device interfaces	
Alarm input	8
Network interface	1 RJ-45 10/100 Mbps self-adaptive
TAMPER	/
RS-485	1 RS-485 (Half duplex)
USB	/
TF card	Support TF card, up to 128 G



No. 333 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T: +86-571-8817-5998
www.hikvision.com

Follow us on social media to get the latest product and solution information.

Hikvision
 HikvisionHQ
 HikvisionHQ
 Hikvision_Global
 Hikvision Corporate Channel
 hikvisionhq

Alarm output	2
Lock control	2 high/low level relays (3.3V/0V)
General	
Button	1 physical button
Installation	Surface mounting
Indicator	/
Weight	Net weight: 355 g (0.8 lb) Gross weight: 899 g (2.0 lb)
Protective level	/
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working humidity	10% to 90% (no-condensing)
Dimension (W × H × D)	180 mm × 140 mm × 22.4 mm (7.09" × 5.51" × 0.88")
Battery	/
Power supply	12 VDC, 1 A, IEEE802.3af, standard PoE
Application environment	Indoor
Power consumption	≤ 8 W
Language	English, Russian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese (Brazil), Spanish, Hebrew, Romanian, Turkish, Estonian, Danish, Swedish, Norwegian, Finnish, Vietnamese, Croatian, Slovenian, Serbian, Arabic, Portuguese (Portugal), Lithuanian, Uzbek, Kazakh, Mongolian, Ukrainian

▪ Available Model

DS-KH8350-TE1

Headquarters


No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



▪ **Dimension**

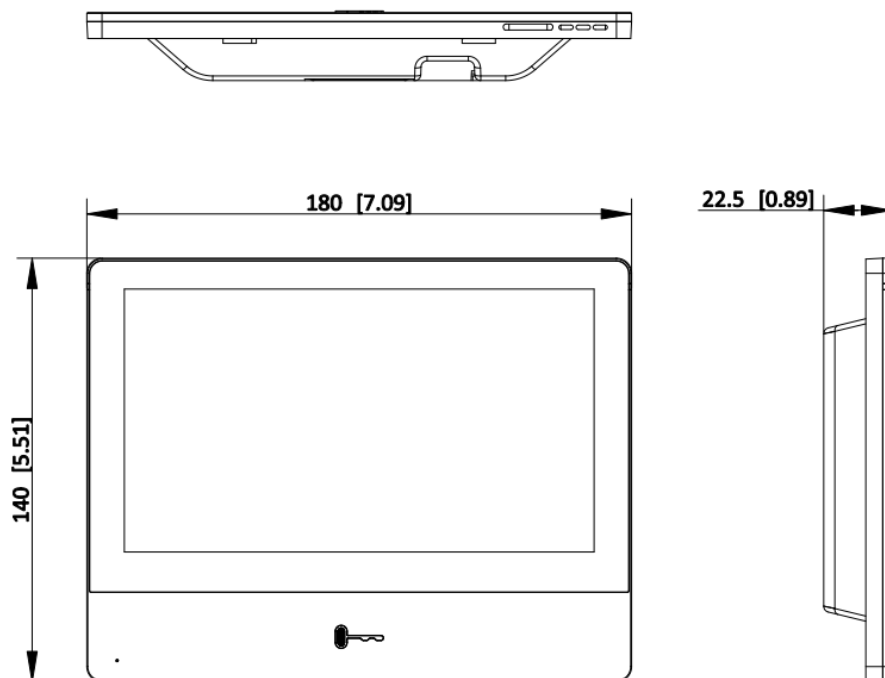

Unit:mm [inch]

SCALE 1:1

▪ **Accessory**

▪ **Optional**

DS-KD8003-IME1 KD8 Series Pro Modular Door Station	DS-KD8003-IME1/FI ush KD8 Series Pro Modular Door Station	DS-KD9613-FE6 Facial Recognition Door station
		

Headquarters

No.555 Qianmo Road, Binjiang District
 Hangzhou 310051, China
 T +86-571-8807-5998
 www.hikvision.com



Follow us on social media to get the latest product and solution information.

